




4/6" 5CCT IN 1 LED Can Lights

■ User Manual

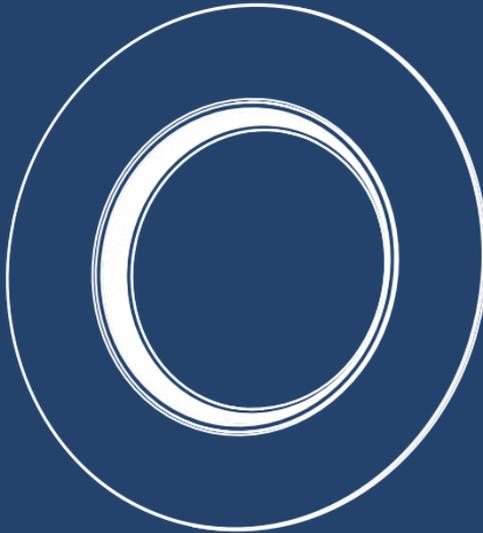


GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders Or you can send your inquiry to our Official Customer Support at:

support@amicolight.com

+1(888) 676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

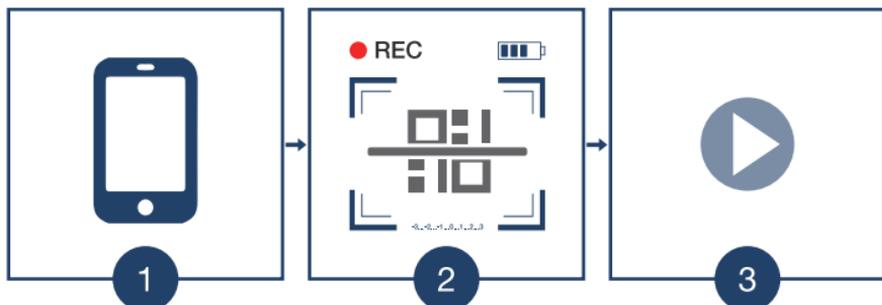


Need a Video Instruction Guide?
Please scan the QR code.

If the QR code is invalid, please contact us for the video .


WARNING

1. DANGER - RISK OF SHOCK- DISCONNECT POWER BEFORE INSTALLATION.
2. WARNING - RISK OF FIRE OR ELECTRIC SHOCK. INSTALLATION OF THIS RETROFIT ASSEMBLY REQUIRES A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE LUMINAIRE'S ELECTRICAL SYSTEM AND THE HAZARD INVOLVED. IF NOT QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A QUALIFIED PERSON.
3. SUITABLE FOR DAMP LOCATIONS. FOR INDOOR USE ONLY.
4. SUITABLE FOR TYPE LC OR NON-IC LUMINAIRES.
5. WARNING - TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS.
6. THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS
7. WARNING - RISK OF FIRE OR ELECTRIC SHOCK. INSTALL THIS KIT ONLY IN THE LUMINAIRES THAT HAS THE CONSTRUCTION FEATURES AND DIMENSIONS SHOWN IN THE PHOTOGRAPHS AND/OR DRAWINGS AND WHERE THE INPUT RATING OF THE RETROFIT KIT DOES NOT EXCEED THE INPUT RATING OF THE LUMINAIRE.
8. DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.
9. THE RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS.

4 inch

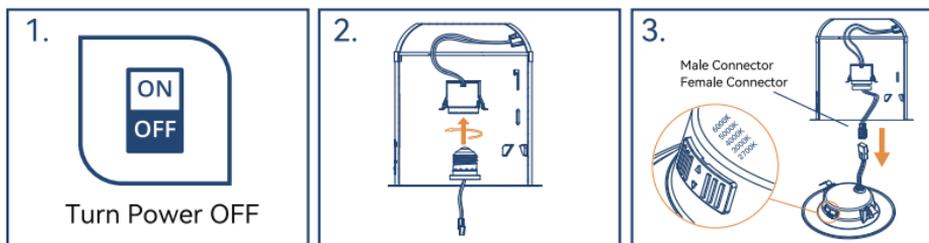


1. Turn off circuit breaker that provides power to the light switch for the recessed lights.
2. Thread the Socket Adapter into the socket.
3. The toggle switch to the specified color temperature.

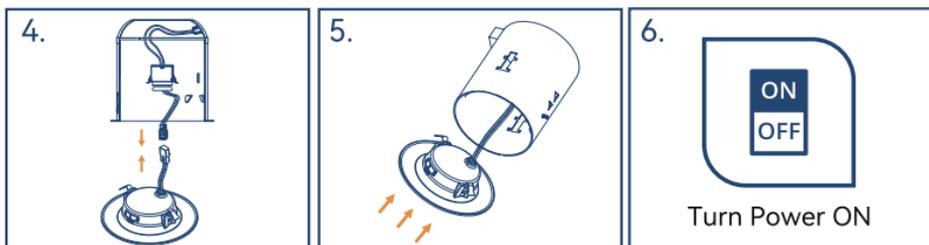


4. Plug the female connector of the retrofit trim onto the male connector of the housing.
5. Tuck all wires into the can and carefully push the retrofit trim into can.
6. Turn on circuit breaker and test light.

6 inch

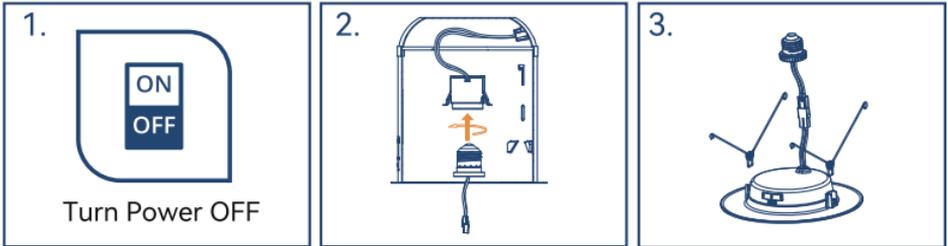

1. Turn off circuit breaker that provides power to the light switch for the recessed lights.
2. Thread the Socket Adapter into the socket.
3. Place the spring as shown. Make sure the spring snaps into the buckle. After installation, check whether the spring will fall off.

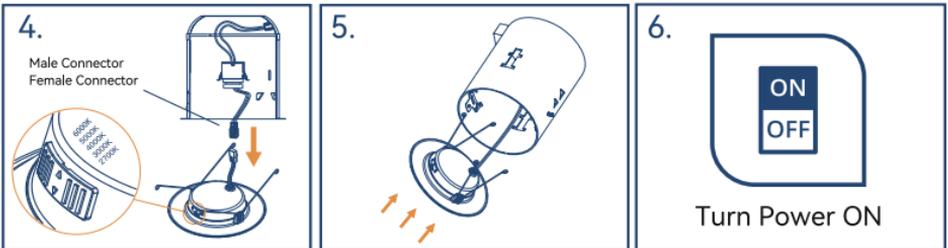

4. Plug the female connector of the retrofit trim onto the male connector of the housing. The toggle switch to the specified color temperature.
5. If using torsion springs, squeeze both torsion spring arms together and insert into the torsion spring slots (or c-clips) of the can. Tuck all wires into the can and carefully push the retrofit trim into can (Note: to provide enough room in shallow cans carefully position SOCKET ADAPTER and SOCKET adjacent to the side of the LED DRIVER prior to inserting the RETROFIT TRIM into the CAN).
6. Turn on circuit breaker and test light.

Brand	Model	Star Rating
LUTRON	AY-600P	★ ★ ★ ★ ☆
	CN-600	★ ★ ★ ★ ☆
	D-603PH	★ ★ ★ ★ ☆
	LGCL-153PL	★ ★ ★ ★ ☆
	DVCL-153P	★ ★ ★ ★ ☆
	TT-300	★ ★ ★ ★ ☆
	DV-600P	★ ★ ★ ★ ☆
	MACL-153M	★ ★ ★ ★ ☆
	AYCL-153P	★ ★ ★ ★ ☆
	TG-600PHLH	★ ★ ★ ★ ☆
	TGCL-153P	★ ★ ★ ★ ☆
	DVCL-153PL	★ ★ ★ ★ ☆
LEVITON	6633-P	★ ★ ★ ★ ☆
	6683	★ ★ ★ ★ ☆
	6684	★ ★ ★ ★ ☆
	IPI06	★ ★ ★ ★ ☆
	6672	★ ★ ★ ★ ☆
	6674	★ ★ ★ ★ ☆
COOPER	DLC03P	★ ★ ★ ★ ☆
	9530WS	★ ★ ★ ★ ☆

PROBLEMS and COUNTERMEASURES

PROBLEM	PROBABLE CAUSE	SOLUTION
Unlit	The wire falls off/loosens/breaks	Check that the wires are well connected
	The power switch is not turned on	Make sure the power switch is on
	The light holder in the UL cans is damaged	Check and replace with a new light holder
	Loose connection between E26 adapter and light base	Check the E26 adapter and light holder are well installed
	Loose connection on TP24 connector	Change the TP24 connector
	The voltage is too high and the product is damaged	Make sure the voltage is 120V
	None of the above	Reach out to our Customer Support
Dim	The wire falls off/loosens/breaks	Check the wires are well connected
	Incompatible dimmer	Check the dimmer model with the manual
	Not setting the dimmer right	Check dimmer settings
	Too many lights are connected to one dimmer	Reduce the number of lights connected to a dimmer (the total power of the lights should be less than 75% of the rated power of the dimmer)
	The brightness of lighting is too low	Install more lights 4inch: 2-4ft; 6inch: 5-7ft
	The brightness of lighting is too high	Turn down the dimmer or reduce the number of lights on at the same time
	Voltage is too low	Check the voltage to make sure it is 120V
	Loose connection between E26 adapter and light base	Check the E26 adapter and light holder are well installed
	The light is not installed correctly	Check the installation of the light, to ensure that the springs and other parts are normal
Flickering	The wire falls off/loosens/breaks	Check the wires are well connected
	Incompatible dimmer	Check the dimmer model with the manual
	Not setting the dimmer right	Check dimmer settings
	Too many lights are connected to one dimmer	Reduce the number of lights connected to a dimmer (the total power of the lights should be less than 75% of the rated power of the dimmer)
	High-power electrical appliances on the same circuit	Reduce the number of lights light on the same time
	Voltage is too low	Check the line voltage to make sure the voltage is 120V
	Loose connection between E26 adapter and light base	Check the E26 adapter and light holder are well installed
Falls	No C-clamp on the can	Replace the can, or install the C-clamp
	The can has C-clamp but the spring was not fixed in the clamp	Re-install
	The spring is loose	Reach out to our Customer Support

01 30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders. Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02 2-Year Warranty


We guarantee your product is free from defects in product material and workmanship for two (2) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.

03 Quick Response within 12 Hours


If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently.

The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.

- ① Log in to your Amazon.com account, click "Returns&Orders" on the top-right corner.

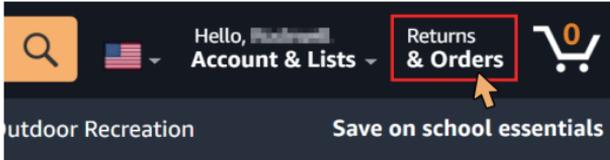


- ② Find your order in the list and click "View order details".

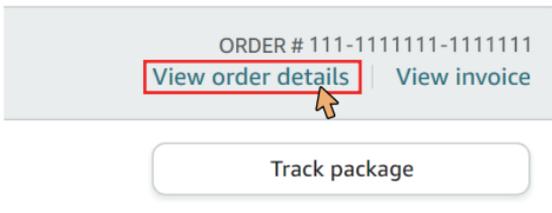

- ③ Click the "Store Name" following the Sold by, below the product title.

Delivered yesterday



Sold by: [Store Name]


Serial Numbers:

AZ: [blurred]

Return eligible through Sep 8, 2021

\$49.99

- ④ Click the yellow button "Ask a question", on the top-right corner, to contact the seller.

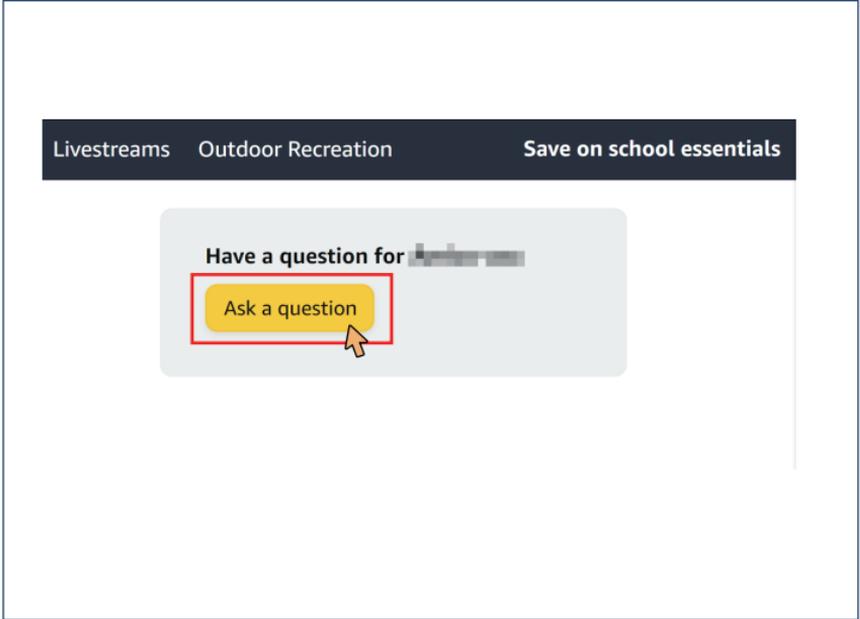

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

Call us:

+1(888) 676-1042

Monday - Friday from 9:00 AM - 5:00PM (PT)

Contact via Email: support@amicolight.com



GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(888) 676-1042 Monday - Friday from 9:00AM - 5:00PM (PT)

MADE IN CHINA