



5 IN 1 Slim Panel LED Recessed Downlight

Amico 6 inch 5CCT LED Recessed Dimmable Lighting

5 color temperature selectable, no need to worry about what color temperature to buy. Ultra-thin canless downlights only require as small as 6 inches ceiling spaces, fitting various ceilings, and joists. 950LM consumes 12.5 Watts equivalent to 85W halogen lamp, saving you up to 90% in energy costs. 2-Year Warranty! We will be 100% responsible for our products!



LIGHT DISTRIBUTION ANGLE

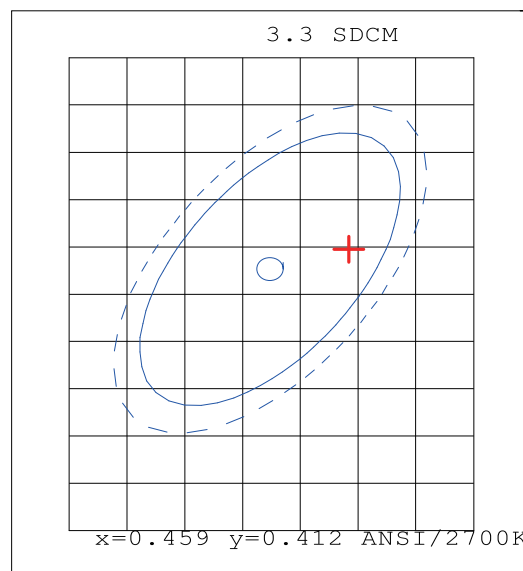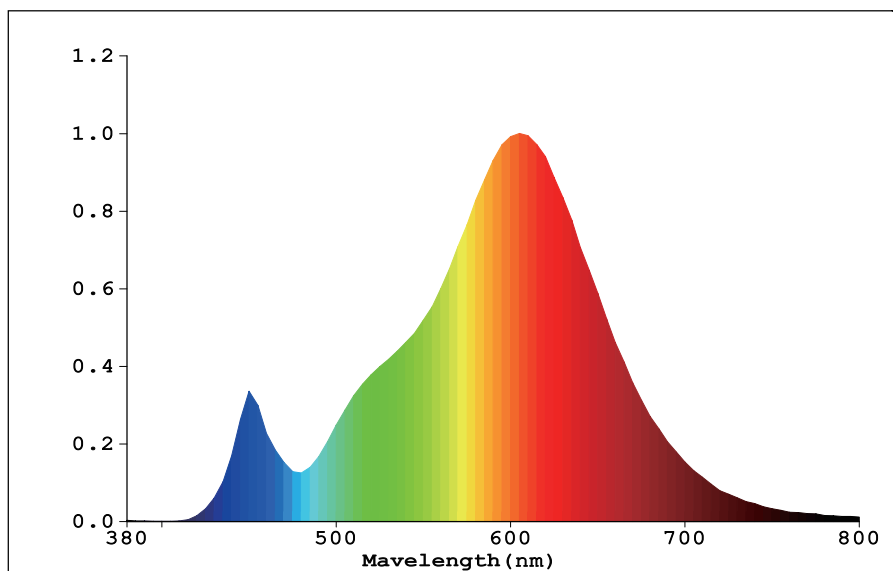

Chromaticity CIE1931 Diagram

SPECIFICATIONS

Input Voltage	120V
Max output Voltage	130V
Wattage	8.5W
Input Current	0.075A
Max output Current	50mA
Power Factor	> 0.9
Lumens	650LM
Equivalency	85W
Color Temperature	2700K/3000K/4000K/5000K/6000K
CRI	80+
Beam Angle	110°
Dimmable	Yes

Efficiency(LM/W)	76Lm/W
Frequency	60Hz
Operating Temperature	-4°F-104°F
Suitable for Damp Locations Ingress	Yes
IC Rated	Yes
Material	Polyamide fibre
Wiring	Copper
Average Life (Hours)	15000hours
Warranty	2-Years
Switching Time	> 7500