


5 CCT IN 1 LED

RECESSED LIGHT WITH NIGHT LIGHT

User Manual

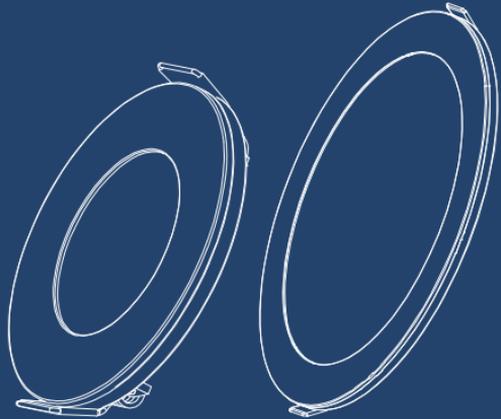

3 inch

8 inch

GET MORE SUPPORT


Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com


 +1(626)313-9318

Monday - Friday from 9:00AM - 5:00PM (PT)

- ① Log into your Amazon.com account, click **"Returns&Orders"** on the top-right corner.

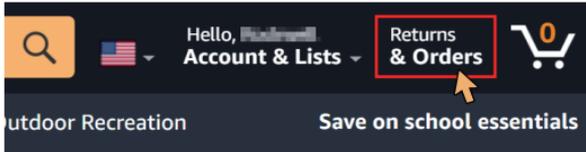


- ② Find your order in the list and click **"View order details"**.

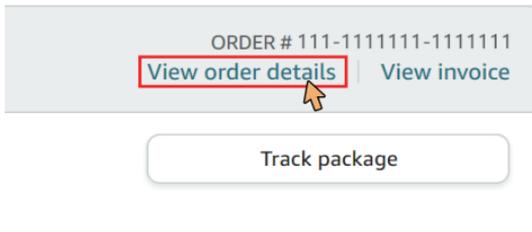


- ③ Click the **"Store Name"** following the Sold by, below the product title.

Delivered yesterday



Sold by: [Store Name]
Serial Numbers:
AZ: [Serial Numbers]
Return eligible through Sep 8, 2021
\$49.99

- ④ Click the yellow button "Ask a question", on the top-right corner, to contact the seller.

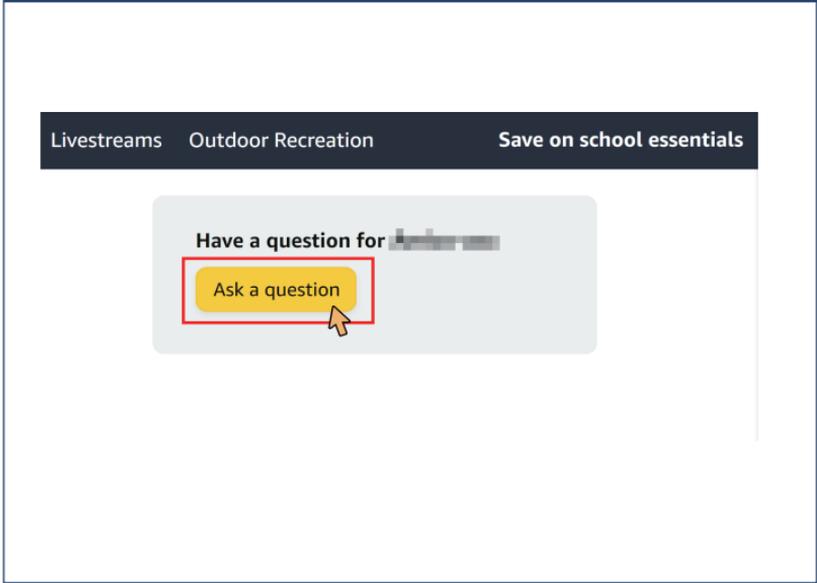

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

Call us:

+1(626)-313-9318

Monday - Friday from 9:00AM - 5:00PM (PT)

Contact via Email: support@amicolight.com

01 30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders. Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02 5-Year Warranty


We guarantee your product is free from defects in product material and workmanship for five (5) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.

03 Quick Response within 12 Hours

If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently.

The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.

INSTALLATION VIDEO

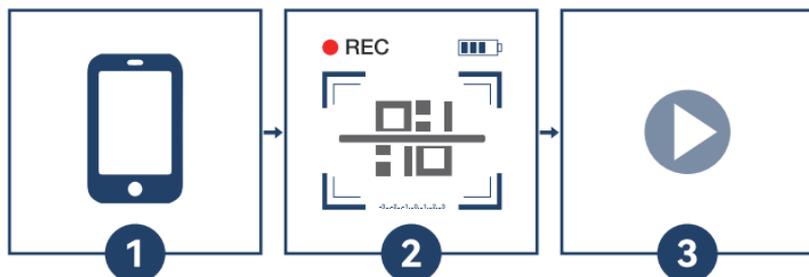

Need a Video Instruction Guide?
Please scan the QR code.

If the QR code is invalid, please contact us for the video.

IMPORTANT

**READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURES.
RETAIN FOR FUTURE REFERENCE.**

SAFETY

For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

ASSEMBLY INSTRUCTIONS

1. Preparing for installation: disconnect electrical power before installing or servicing any part of this fixture.
2. Locate a suitable position to plate the fixture and open in accordance to the cut-hole dimensions (refer to hole cut table for appropriate size).
3. Run electrical wire from the switch (power supply) through the mounting hole—use nmd90 romex or bx cable.

WARNING

- Make certain power is off from the electrical panel before starting installation or attempting any maintenance. Indoor installation only.
- Risk of fire or electrical shock. Do not alter, relocate or remove wiring, junction box, power supply or any other electrical components.
- Suitable for Wet Locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.

SPECIFICATIONS

3" 5CCT IN 1 LED Recessed light with Night Light


Voltage	120V
Wattage	7W
Lumen	500LM
Average Life(hours)	50000h
Warranty	5 years
Color Temperature	2700K/3000K/3500K/4000K/5000K +2000K (Night Light)

8" 5CCT IN 1 LED Recessed light with Night Light

Voltage	120V
Wattage	18W
Lumen	1600LM
Average Life(hours)	50000h
Warranty	5 years
Color Temperature	2700K/3000K/3500K/4000K/5000K +2000K (Night Light)

ACCESSORIES LIST


A

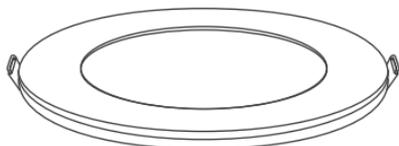

LED Light

×1

B



J-Box driver

×1


C



Connectors

×3

D



Hole cutout card

×1


INSTALLATION STEPS

- step: 1** Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter.

HOLE SIZE


3inch: 3 5/64" (78mm)

8inch: 8 5/65" (205mm)

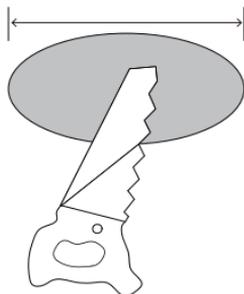

- step: 2** Open the J-Box cover and remove the appropriate knockout(s) on the side panel. Install the appropriate cable clamp(s) (not included) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 3 connectors. Attach white to white, black to black, copper to the ground wire.

Black — L
White — N
Copper — G

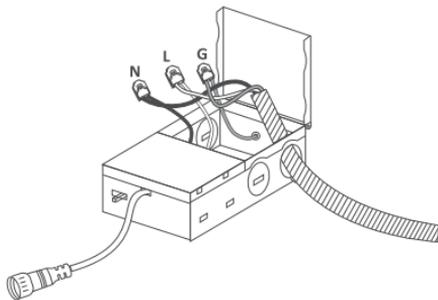


INSTALLATION STEPS


step: 3 Insert J-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. Select lamp color desired with the CCT switch.

5 IN 1

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

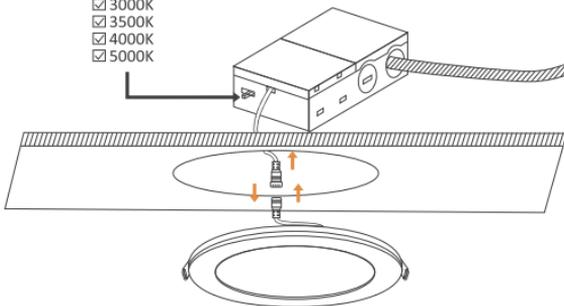


step: 4 Push the spring-loaded clips into the mounting hole upwards and insert the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling.

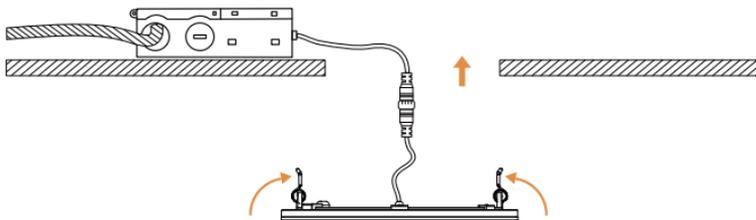

INSTALLATION STEPS

step: 5 Turn on the power after installation , check the fixture can work well.

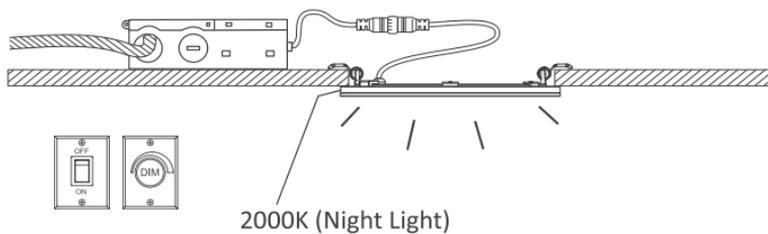

INSTALLATION STEPS

SELECTING DOWNLIGHT OR NIGHTLIGHT MODE

NOTE: The factory setting for the correlated color temperature (CCT) is 2700K, which is the warmest white light.

1. SELECTING MAIN LIGHT MODE OR NIGHT LIGHT MODE.

The product has two modes: main light mode and night light mode.

Main light mode provides full brightness and allows selection from five color temperatures: 2700K , 3000K , 3500K , 4000K and 5000K.

Night light mode provides reduced light output at 2000K color temperature for very soft illumination at night.

2.CONVENIENT CONTROL USING LIGHT SWITCH.

NOTE: The main downlight will not provide light output when the nightlight trim is illuminated.

Switch the downlight off and back on again within (1~4) seconds to activate night light mode.



COMMON TROUBLESHOOTING

PROBLEMS AND COUNTERMEASURES

PROBLEM	PROBABLE CAUSE	SOLUTION
Unlit	The wire falls off/loosens/breaks	Check that the wires are well connected
	The power switch is not turned on	Ensure that the power switch is on
	Voltage is too high, product is damaged	Ensure that the voltage is 120V
	None of the above	Reach out to our Customer Support
Dim	Incompatible dimmer	Check and choose a dimmer from the recommended dimmer list
	Not setting the dimmer right	Check dimmer Settings
	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	The brightness of lighting is too low	Install more lights and recommended spacing for installation of 4" lights: 2-4ft, & 6" lights: 5-7ft
	The brightness of lighting is too high	Lower the dimmer or reduce the number of lights at the same time
	Mix the junction boxes (4" and 6")	Check if the junction box matches
	The product is not installed in place	Check the product installation steps to ensure that the springs and other parts are normal
	None of the above	Reach out to our Customer Support
Flickering	The wire falls off/loosens/breaks	Check that the wires are well connected
	Incompatible dimmer	Check and choose a dimmer from the recommended dimmer list
	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	High-power electrical appliances on the same circuit	Reduce the number of lights at the same time
	Voltage is too low	Check the circuit voltage to make sure the voltage is 120V
	None of the above	Reach out to our Customer Support
Overheating	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	None of the above	Reach out to our Customer Support

DIMMER COMPATIBILITY GUIDE

BRAND	MODEL	STAR RATING
LUTRON	TG-600PR-WH	★ ★ ★ ★ ↘
	S-600PR-WH	★ ★ ★ ★ ↘
	CTCL-153PDH-WH	★ ★ ★ ★ ↘
	TGCL-153PH-LA	★ ★ ★ ★ ↘
	SLV-600P-AL	★ ★ ★ ★ ↘
	DV-600PR-WH	★ ★ ★ ★ ↘
	SCL-153PH-WH	★ ★ ★ ★ ↘
	GT-600P	★ ★ ★ ★ ↘
	DVCL-153P	★ ★ ★ ★ ↘
	RNL06	★ ★ ★ ★ ↘
	MSCL-OP153M	★ ★ ★ ★ ↘
	IPL06	★ ★ ★ ★ ↘
	LEVITON	6672
6674		★ ★ ★ ★ ↘
DSL06		★ ★ ★ ★ ↘
PD-6WCL		★ ★ ★ ★ ↘
MACL-153M//MA-R		★ ★ ★ ★ ↘

After Sales Service

1. Please stop using the product immediately if the product shows any visible defect and contact customer service.
2. If there is any problem with the recessed lighting for non-human reasons, please reach out to customer support. We will send you a brand-new replacement without the need of returning the original product or a full refund.
3. If you are not completely satisfied with the product after installation but prefer not to disassemble, get in touch with our customer support right away and we provide comparable compensations.



GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders.

Or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(626)313-9318 Monday - Friday from 9:00AM - 5:00PM (PT)

MADE IN CHINA