




# 3" 5CCT IN 1

## LED RECESSED LIGHT

### ■ User Manual

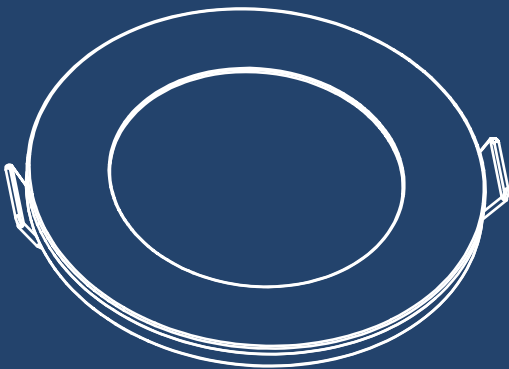

### GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders Or you can send your inquiry to our Official Customer Support at:


✉ [support@amicolight.com](mailto:support@amicolight.com)

☎ +1(888)676-1042


Monday - Friday from 9:00AM - 5:00PM (PT)



- ① Log into your Amazon.com account, click **"Returns&Orders"** on the top-right corner.

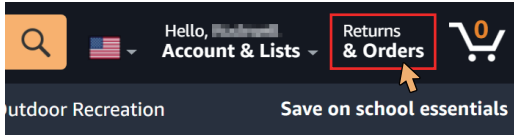

- ② Find your order in the list and click **"View order details"**.

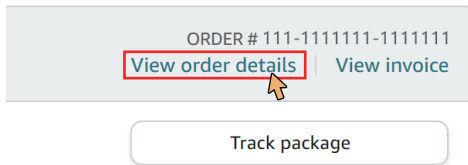

- ③ Click the **"Store Name"** following the Sold by, below the product title.

## Delivered yesterday



- ④ Click the yellow button "Ask a question", on the top-right corner, to contact the seller.

Livestreams Outdoor Recreation Save on school essentials

Have a question for [redacted]

Ask a question

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

## Call us:

+1(888)676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

**Contact via Email:** [support@amicolight.com](mailto:support@amicolight.com)

01

## 30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders. Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02

## 5-Year Warranty

We guarantee your product is free from defects in product material and workmanship for five (5) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.


03

## Quick Response within 12 Hours

If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently.

The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.

# INSTALLATION VIDEO

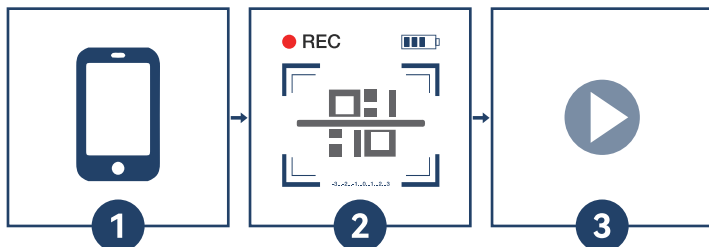

Need a Video Instruction Guide?  
Please scan the QR code.

If the QR code is invalid, please contact us for the video.

# SAFETY INFORMATION

## IMPORTANT

**READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURES.  
RETAIN FOR FUTURE REFERENCE.**

## SAFETY

For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

## ASSEMBLY INSTRUCTIONS

1. Preparing for installation: disconnect electrical power before installing or servicing any part of this fixture.
2. Locate a suitable position to plate the fixture and open in accordance to the cut-hole dimensions (refer to hole cut table for appropriate size).
3. Run electrical wire from the switch (power supply) through the mounting hole—use nmd90 romex or bx cable.

## WARNING


- Make certain power is off from the electrical panel before starting installation or attempting any maintenance.  
Indoor installation only.
- Risk of fire or electrical shock. Do not alter, relocate or remove wiring, junction box, power supply or any other electrical components.
- Suitable for Wet Locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.

## SPECIFICATIONS

|                     |                               |
|---------------------|-------------------------------|
| Voltage             | 120V                          |
| Wattage             | 7W                            |
| Lumen               | 500LM                         |
| Average Life(hours) | 50000h                        |
| Warranty            | 5 years                       |
| Color Temperature   | 2700K/3000K/3500K/4000K/5000K |

# ACCESSORIES LIST


A



LED Light

×1

B



J-Box driver

×1


C



Connectors

×3

D



Hole cutout card


×1

# INSTALLATION STEPS

- step: 1** Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter.


## HOLE SIZE

3inch:3 5/64"(78mm)




- step: 2** Open the J-Box cover and remove the appropriate knockout(s) on the side panel. Install the appropriate cable clamp(s) ( not included ) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 3 connectors. Attach white to white, black to black, copper to the ground wire.

Black ——— L  
White ——— N  
Copper ——— G

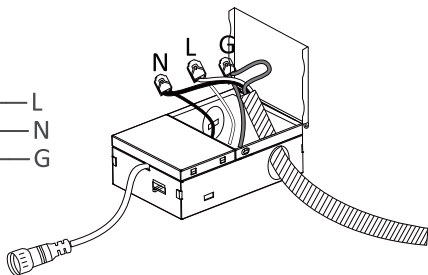


# INSTALLATION STEPS

- step: 3** Insert J-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. Select lamp color desired with the CCT switch.

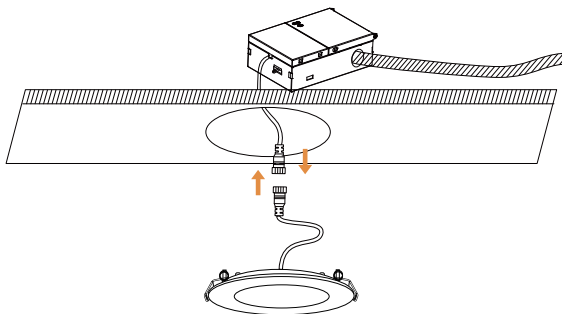


- step: 4** Push the spring-loaded clips into the mounting hole upwards and insert the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling.

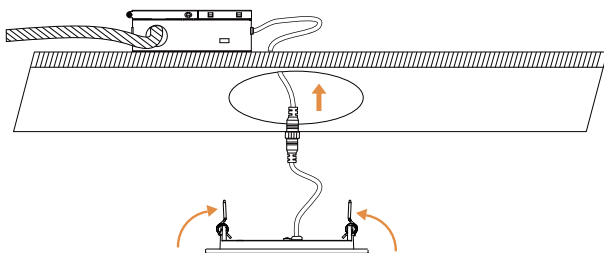

# INSTALLATION STEPS

- step: 5** Turn on the power after installation , check the fixture can work well.



# COMMON TROUBLESHOOTING

## PROBLEMS AND COUNTERMEASURES

| PROBLEM     | PROBABLE CAUSE                                       | SOLUTION                                                                                                |
|-------------|------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Unlit       | The wire falls off/loosens/breaks                    | Check that the wires are well connected                                                                 |
|             | The power switch is not turned on                    | Ensure that the power switch is on                                                                      |
|             | Voltage is too high, product is damaged              | Ensure that the voltage is 120V                                                                         |
|             | None of the above                                    | Reach out to our Customer Support                                                                       |
| Dim         | Incompatible dimmer                                  | Check and choose a dimmer from the recommended dimmer list                                              |
|             | Not setting the dimmer right                         | Check dimmer Settings                                                                                   |
|             | Too many lights are connected to one dimmer          | Total Power Of the Lights $\leq$ 75% of the Rated Power of the Dimmer                                   |
|             | The brightness of lighting is too low                | Install more lights and recommended spacing for installation of<br>4" lights: 2-4ft, & 6" lights: 5-7ft |
|             | The brightness of lighting is too high               | Lower the dimmer or reduce the number of lights at the same time                                        |
|             | Mix the junction boxes (4" and 6")                   | Check if the junction box matches                                                                       |
|             | The product is not installed in place                | Check the product installation steps to ensure that the springs and other parts are normal              |
|             | None of the above                                    | Reach out to our Customer Support                                                                       |
| Flickering  | The wire falls off/loosens/breaks                    | Check that the wires are well connected                                                                 |
|             | Incompatible dimmer                                  | Check and choose a dimmer from the recommended dimmer list                                              |
|             | Too many lights are connected to one dimmer          | Total Power Of the Lights $\leq$ 75% of the Rated Power of the Dimmer                                   |
|             | High-power electrical appliances on the same circuit | Reduce the number of lights at the same time                                                            |
|             | Voltage is too low                                   | Check the circuit voltage to make sure the voltage is 120V                                              |
|             | None of the above                                    | Reach out to our Customer Support                                                                       |
| Overheating | Too many lights are connected to one dimmer          | Total Power Of the Lights $\leq$ 75% of the Rated Power of the Dimmer                                   |
|             | None of the above                                    | Reach out to our Customer Support                                                                       |

# DIMMER COMPATIBILITY GUIDE

| BRAND   | MODEL          | STAR RATING |
|---------|----------------|-------------|
| LUTRON  | TG-600PR-WH    | ★ ★ ★ ★ ↗   |
|         | S-600PR-WH     | ★ ★ ★ ★ ↗   |
|         | CTCL-153PDH-WH | ★ ★ ★ ★ ↗   |
|         | TGCL-153PH-LA  | ★ ★ ★ ★ ↗   |
|         | SLV-600P-AL    | ★ ★ ★ ★ ↗   |
|         | DV-600PR-WH    | ★ ★ ★ ★ ↗   |
|         | SCL-153PH-WH   | ★ ★ ★ ★ ↗   |
|         | GT-600P        | ★ ★ ★ ★ ↗   |
|         | DVCL-153P      | ★ ★ ★ ★ ↗   |
|         | RNL06          | ★ ★ ★ ★ ↗   |
|         | MSCL-OP153M    | ★ ★ ★ ★ ↗   |
|         | IPL06          | ★ ★ ★ ★ ↗   |
|         |                |             |
| LEVITON | 6672           | ★ ★ ★ ★ ↗   |
|         | 6674           | ★ ★ ★ ★ ↗   |
|         | PD-6WCL        | ★ ★ ★ ★ ↗   |
|         | DSL06          | ★ ★ ★ ★ ↗   |
|         | MACL-153M/MA-R | ★ ★ ★ ★ ↗   |

## After Sales Service

1. Please stop using the product immediately if the product shows any visible defect and contact customer service.
2. If there is any problem with the recessed lighting for non-human reasons, please reach out to customer support. We will send you a brand-new replacement without the need of returning the original product or a full refund.
3. If you are not completely satisfied with the product after installation but prefer not to disassemble, get in touch with our customer support right away and we provide comparable compensations.



## GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders.

Or you can send your inquiry to our Official Customer Support at:



[support@amicolight.com](mailto:support@amicolight.com)



+1(888)676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

**MADE IN CHINA**