


6"5CCT IN 1

LED Recessed Downlight

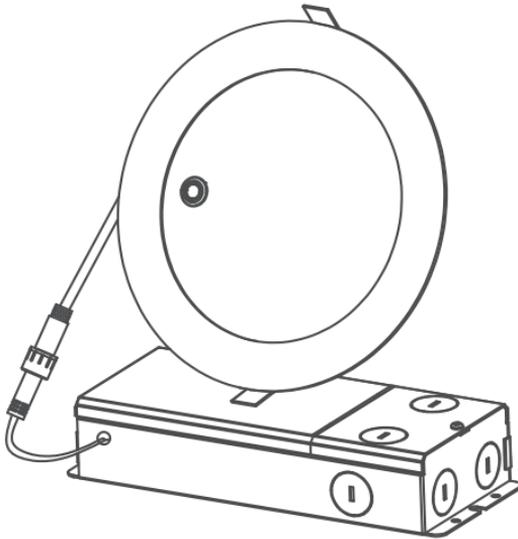

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

support@amicolight.com

+1(888) 676-1042 Monday - Friday from 9:00AM - 5:00PM (PT)



SAFETY INFORMATION

IMPORTANT

READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURES.
RETAIN FOR FUTURE REFERENCE.

1. WARNING : RISK OF SHOCK House electric current can cause painful shock or serious injury unless handled properly. For your safety always remember to :

- Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.


2. This fixture is designed for use in a circuit protected by a fuse or circuit breaker. it is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

3. WARNING : RISK OF CUTS Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.

4. Account for small parts and destroy packing material, as these may be hazardous to children.



INSTALLATION VIDEO

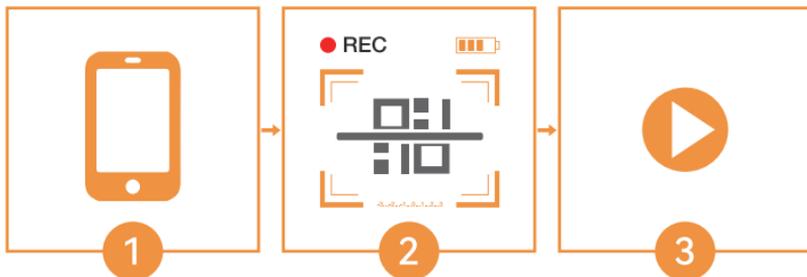

Need a Video Instruction Guide?
Please scan the QR code.

If the QR code is invalid, please contact us for the video.



HOW TO INSTALL

Step 1

Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter.


HOLE SIZE

6INCH:6.29" (160mm)




Step 2

Open the J-Box cover and remove the appropriate knockout (s) on the side panel. Install the appropriate cable clamp (s) (not included) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 4 connectors. Attach white to white, black to black, copper to the ground wire.

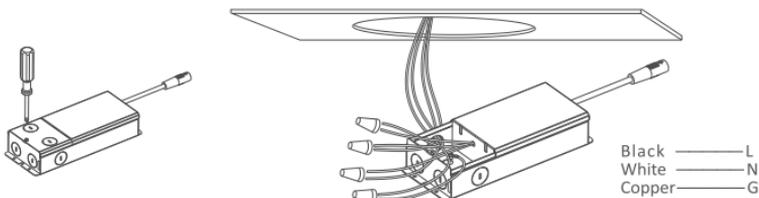

Wiring diagram

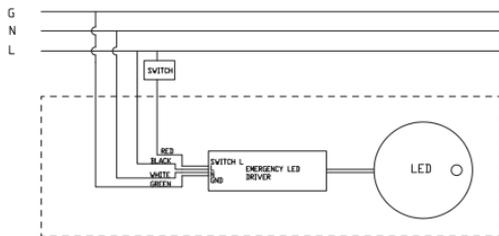




HOW TO INSTALL

Step 3

Insert J-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. Select lamp color desired with the CCT switch.


5 IN 1

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

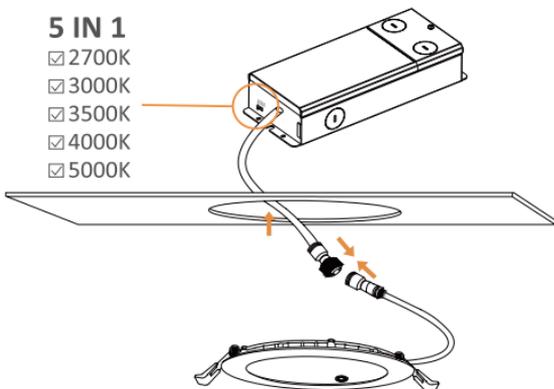

Step 4

Push the spring-loaded clips into the mounting hole upwards and insert the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling.


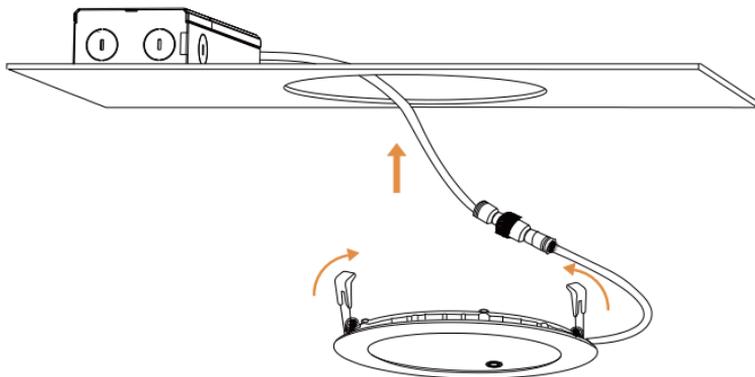




HOW TO INSTALL

Step 5

Turn on the power after installation, check the fixture can work well.

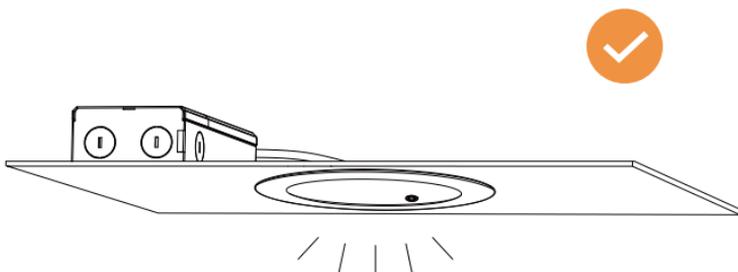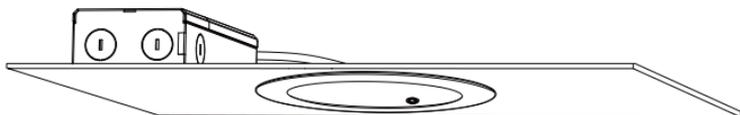




EMERGENCY FUNCTION


The light auto shift to Emergency Mode in the case of power off

1. Ordinary Working Mode

Connecting the light with power correctly, Charging Indicator On;
Press "SWITCH" to turn on/off the light

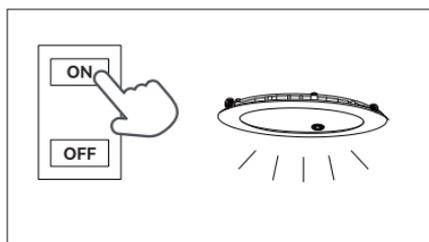


Press ON Button, light on

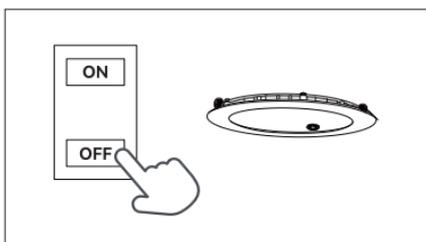

Press OFF Button, light off

Press TEST Switch Button to test emergency function

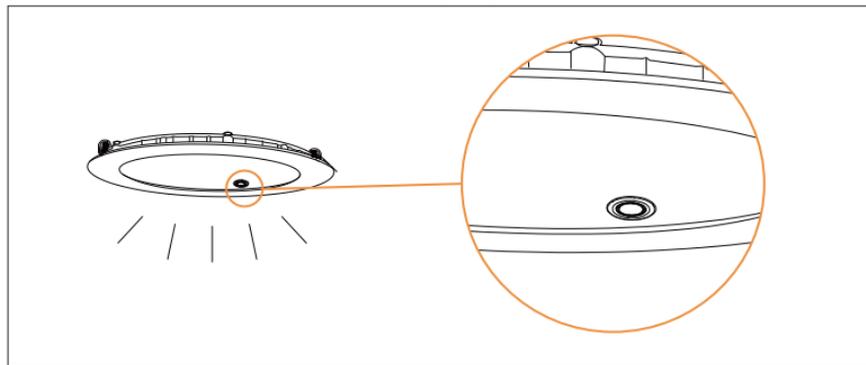


Either the Switch on/off, press TEST Switch Button, the light shift to Emergency Mode, the power is around 16W.



2. Emergency Working Mode

No power supply, Charging Indicator off, the light shift to Emergency Mode, the power is around 16W.

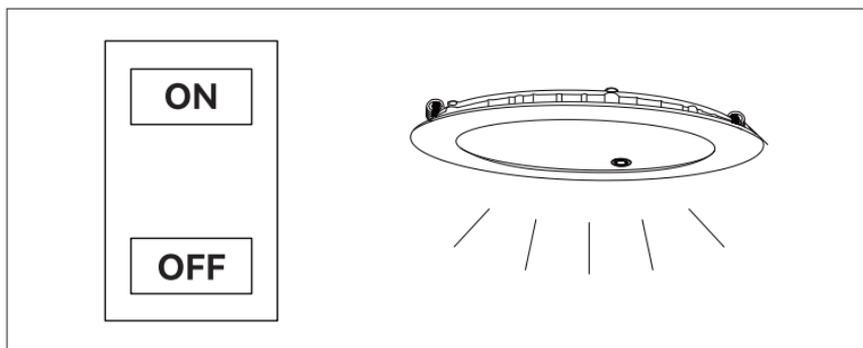

1. **WARNING** : Risk of fire. Use AC120V 50/60Hz circuits.
2. Suitable for damp locations. Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electrical wiring experience, please refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. Reliable operating temperature is 0 to +40 degrees Celsius (32 to +104 degrees Fahrenheit).
3. Please obey fire prevention regulations, do not cover the fixture with any heat insulated materials.
4. Do not change the LED light source or driver inside under any circumstance.



PRODUCT FEATURES

Color Temperature	2700K/3000K/3500K/4000K/5000K
Power	16W
Lumens (lm)	1200LM
Input voltage	AC 120V
Emergency Time	≥90min

LED Emergency Driver

Work indicator status

Model	Test Switch Operation	Indicator Status	Comment & Solutions
AC MODE(1)	NO press	Blink slowly during charging (2S on,2S off)/ steady on after full.	Normal drive output & battery charging.
AC MODE(2)	Long time press	OFF	The EM driver will turn into emergency test, release and will end off the emergency mode.
DC MODE(1)	NO press	OFF	Until battery is fully discharged, exit emergency mode after discharge.
PROBLEM: When 0.05S is on and 0.05S is off, it means that the power supply is faulty, please contact the manufacturer.			



DIMMER COMPATIBILITY GUIDE

BRAND	MODEL	STAR RATING
LEVITON	DSL06-1LZ	★ ★ ★ ★
	6674-P0W	★ ★ ★
LUTRON	MACL-153MR-WH	★ ★ ★
	SCL-153P-WH	★ ★ ★ ★ ★
	PD-6WCL-WH	★ ★ ★ ★
	CTCL-153P-WH	★ ★ ★ ★ ★
	DVWCL-153P-WH	★ ★ ★
	DVCL-153P-WH	★ ★ ★ ★




COMMON TROUBLESHOOTING

PROBLEMS AND COUNTERMEASURES


PROBLEM	PROBABLE CAUSE	SOLUTION
Unlit	The wire falls off/loosens/breaks	Check that the wires are well connected
	The power switch is not turned on	Ensure that the power switch is on
	Voltage is too high, product is damaged	Ensure that the voltage is 120V
	None of the above	Reach out to our Customer Support
Dim	Incompatible dimmer	Check and choose a dimmer from the recommended dimmer list
	Not setting the dimmer right	Check dimmer Settings
	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	The brightness of lighting is too low	Install more lights and recommended spacing for installation of 4" lights: 2-4ft, & 6" lights: 5-7ft
	The brightness of lighting is too high	Lower the dimmer or reduce the number of lights at the same time
	Mix the junction boxes (4" and 6")	Check if the junction box matches
	The product is not installed in place	Check the product installation steps to ensure that the springs and other parts are normal
None of the above	Reach out to our Customer Support	
Flickering	The wire falls off/loosens/breaks	Check that the wires are well connected
	Incompatible dimmer	Check and choose a dimmer from the recommended dimmer list
	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	High-power electrical appliances on the same circuit	Reduce the number of lights at the same time
	Voltage is too low	Check the circuit voltage to make sure the voltage is 120V
	None of the above	Reach out to our Customer Support
Over-heating	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	None of the above	Reach out to our Customer Support



- ① Log into your Amazon.com account, click "Returns&Orders" on the top-right corner.

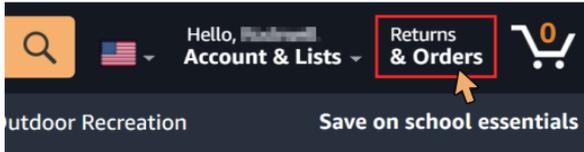


- ② Find your order in the list and click "View order details".

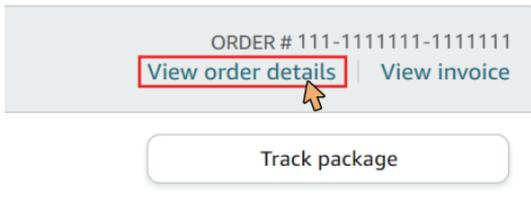

- ③ Click the "store name" following the Sold by, below the product title.

Delivered yesterday



Sold by: [store name]

Serial Numbers:

AZ: [blurred]

Return eligible through Sep 8, 2021

\$49.99



④ Click the yellow button "Ask a question", on the top-right corner, to contact the seller.

Livestreams Outdoor Recreation Save on school essentials



Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

Call us:

+1(888) 676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

Contact via Email: support@amicolight.com



01 30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders.

Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02 5-Year Warranty

We guarantee your product is free from defects in product material and workmanship for five (5) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.

03 Quick Response within 12 Hours

If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently. The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.



GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(888) 676-1042 Monday - Friday from 9:00AM - 5:00PM (PT)

MADE IN CHINA