



Combination Receptacle

/ USB Charger



■ User Manual



GET MORE SUPPORT


Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders or you can send your inquiry to our Official Customer Support at:

✉ support@amicolight.com

☎ +1(888) 676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

INSTALLATION VIDEO

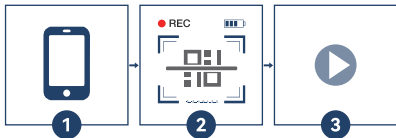

Need a Video Instruction Guide?
Please scan the QR code.

If the QR code is invalid, please contact us for the video.

SAFETY INFORMATION

WARNINGS AND CAUTIONS

- To be installed and used in accordance with appropriate code and regulations.
- If you are not sure about any part of these instructions, consult an electrician.
- To be used with Class 2 connectors with interconnecting cables.
- The Class 2 USB ports are not intended for use with appliances and supporting products.
- All connected Class 2 output cables must be routed away from the receptacle slots or any plug /cord inserted into the receptacle.
- Use this device with copper or copper clad wire only.
- Charging Devices with Batteries -Reducing the risk of overheating, fire, or explosion of batteries during recharging by checking the compatibility with appliance manufacturer's charging instructions.

FEATURES

- The Receptacle provide 5V DC powered USB ports with a total of 6A charging current.
- Charge most compatible electrical device directly without an adapter.
- If the devices combined power requirements exceed the power capacity of the USB ports,the charger will shut down to protect your electrical devices.
- Replace a standard single or duplex receptacle.
- The USB ports are used to charge portable electronic devices ONLY(NO data transfer capability)
- Back and side wire for easy installation.

COMPATIBILITY

The USB charger is compatible with USB powered devices such as:

iPad@	iPhone@	iPod@
GPS	Game Systems	Mobile Phones
E-Readers	Blackbemy	Tablets
BluetoothC	Headsets	Digital Cameras

APPLICATION


Cates	Labs	Office
Restaurants	Bedroom	Hotels
Salons	Kitchens	School
Libraries	Meeting Rooms	Workstations
Airport Lounges		

HOW TO INSTALLATION

WARNINGS AND CAUTIONS

1. This device is to be installed in a wall box measuring at least 3"x2"x2-1/2" (standard single gang electrical wall box) and wired in accordance with NEC article 314 box fill requirements.
2. Connect wires per WIRING DIAGRAM as follows:
NOTE: Back and side wire terminals accept #14-#12 AWG copper or copper clad wires.
 - a. To Side Wire (if more than one wire is required on a terminal, you cannot side wire and must use the backwire option):
Remove insulation from each circuit conductor per strip gage on device [approx. 4/5" (20mm)]. Loop wires clockwise 3/4 turn around terminal screws. **FIRMLY** tighten screws over wire loop with the torque force among, 14-16 in-lbf.
 - b. To Back Wire: Remove insulation from each circuit conductor [approx. 3/5" (15 mm)]. Insert straight wires under clamps next to torque force among, 14-16 in-lbf.
3. Mount device in wall box with screws provided and mount wall plate.
4. Restore power at circuit breaker or fuse. Installation is complete.


WIRING DIAGRAM




STRIP GAUGE
SIDE WIRE:



4/5" 20mm



STRIP GAUGE
SIDE WIRE:




3/5" 15mm

GROUND
GREEN

NEUTRAL
WHITE

HOT
BLACK

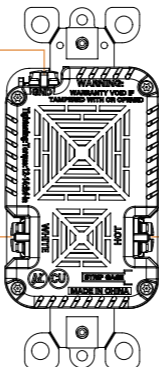

Cu

~~AL~~

FCC COMPLIANCE STATEMENT

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions;

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation of the device.

Product Information

Rating:	20Amp, 125V AC at outlet
Wire Gauge:	14-12 AWG
Operating Temperature:	-20°C to 40°C
USB Rated Voltage:	Type A1: 5V DC 2.4A Type C1: 5V DC 3.0A Type C2: 5V DC 3.0A
NEMA:	5-20R 1-20R

01 30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders. Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02 3-Year Warranty

We guarantee your product is free from defects in product material and workmanship for three (3) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.


03 Quick Response within 12 Hours

If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently.

The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.


CONTACT US

Step 1



Log into your Amazon.com account, click "Returns & Orders" on the top-right corner.


Step 2



Find your order in the list and click "View order details".


Step 3

Delivered yesterday



Click the "Store Name" following the Sold by, below the product title.

Step 4




Click the yellow button "Ask a question", on the top-right corner, to contact the seller.



GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(888) 676-1042 Monday - Friday from 9:00AM - 5:00PM (PT)

MADE IN CHINA