



5 IN 1 Slim Panel LED Recessed Downlight

Amico 6 Inch 5CCT Gimbal LED Recessed Lighting, 360°&90°Adjustable
 5 color temperature selectable, no need to worry about what color temperature to buy. Ultra-thin canless downlights only require as small as 6 inches ceiling spaces, fitting various ceilings, and joists. 1200LM consumes 12 Watts equivalent to 120W halogen lamp, saving you up to 90% in energy costs. 5-Year Warranty! We will be 100% responsible for our products!

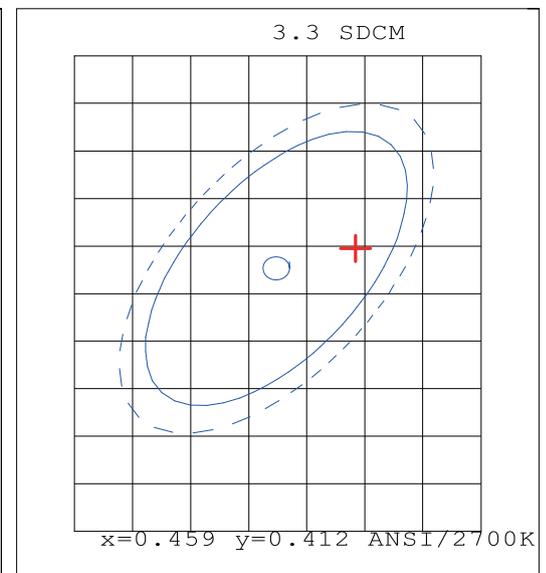

LIGHT DISTRIBUTION ANGLE

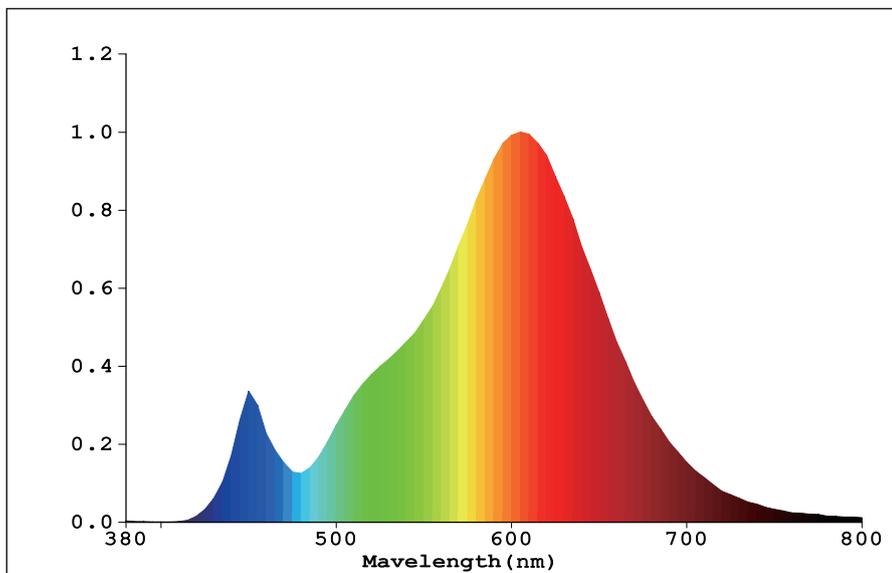

Chromaticity CIE1931 Diagram

SPECIFICATIONS

Input Voltage	120V	Efficiency(LM/W)	100Lm/W
Max output Voltage	36V	Frequency	60Hz
Wattage	12W	Operating Temperature	-4°F-104°F
Input Current	0.111A	Suitable for Damp Locations Ingress	Yes
Max output Current	280mA	IC Rated	Yes
Power Factor	> 0.9	Housing	Metal
Lumens	1200LM	Wiring	Copper
Equivalency	120W	Average Life (Hours)	50000hours
Color Temperature	2700K/3000K/3500K/4000K/5000K	Warranty	5-Years
CRI	90+	Switching Time	> 30000
Beam Angle	38°		
Dimmable	Yes		