



5 IN 1 Slim Panel LED Recessed Downlight

Amico 5/6 inch Motion Sensor Recessed Light, LED Retrofit Can Lights
 5 color temperature selectable, no need to worry about what color temperature to buy. Ultra-thin canless downlights only require as small as 6 inches ceiling spaces, fitting various ceilings, and joists. 950LM consumes 12.5 Watts equivalent to 100W halogen lamp, saving you up to 90% in energy costs. 2-Year Warranty! We will be 100% responsible for our products!

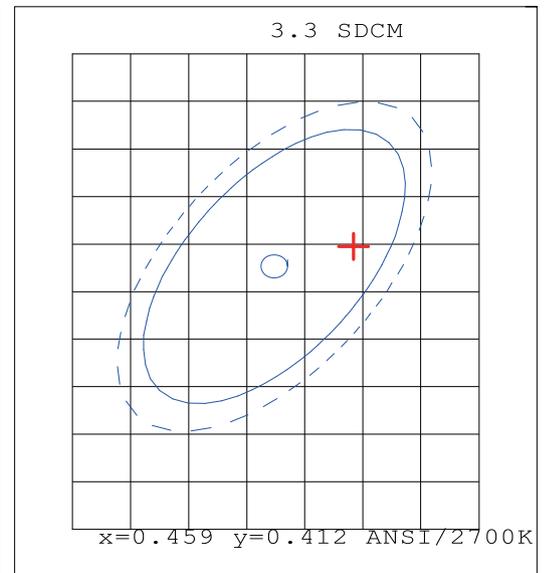

LIGHT DISTRIBUTION ANGLE

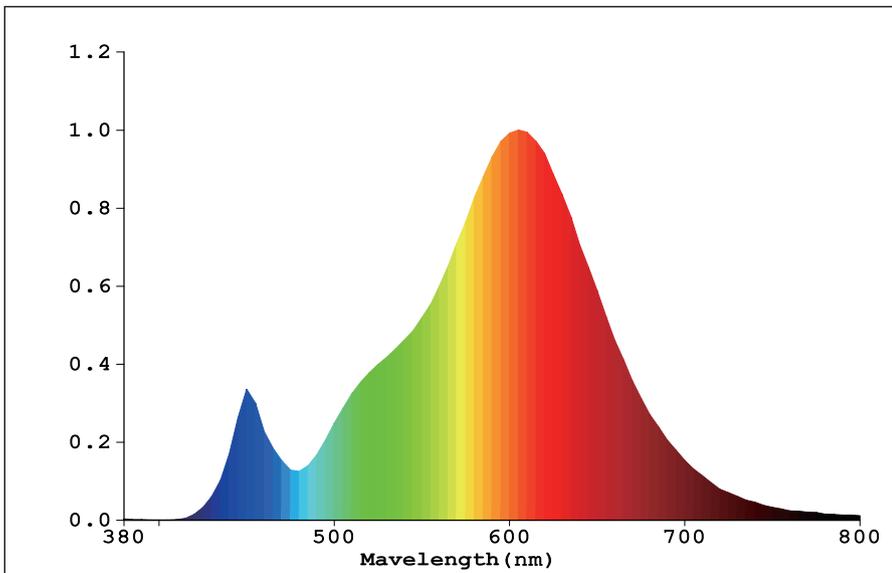

Chromaticity CIE1931 Diagram

SPECIFICATIONS

Input Voltage	120V	Efficiency(LM/W)	76Lm/W
Max output Voltage	130V	Frequency	60Hz
Wattage	12.5W	Operating Temperature	-4°F-104°F
Input Current	0.105A	Suitable for Damp Locations Ingress	Yes
Max output Current	65mA	IC Rated	Yes
Power Factor	> 0.9	Housing	Polyamide fibre
Lumens	950LM	Wiring	Copper
Equivalency	100W	Average Life (Hours)	15000hours
Color Temperature	2700K/3000K/4000K/5000K/6000K	Warranty	2-Years
CRI	80+	Switching Time	> 7500
Beam Angle	120°	Detection Range	10FT
Dimmable	No		