

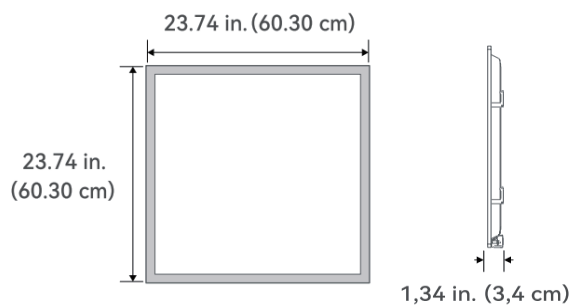


2X2 LED FLAT PANEL WITH SELECTABLE 3CCT

Back-lit emitting, Ultra slim design, light weight
Meet DLC 5.1 standard and premium version
3CCT and 3 wattages (20/30/40W) selectable
0-10V Dimming (10~100% Dimming range),
Easy and Safe Installation
Suitable for damp location
50000 Hours Lifespan

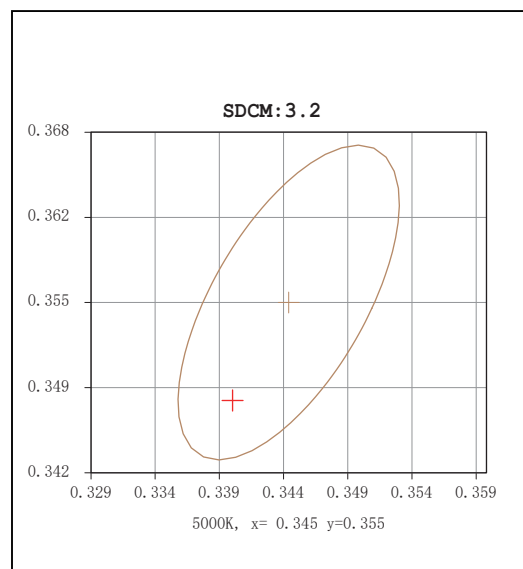

LIGHT DISTRIBUTION ANGLE

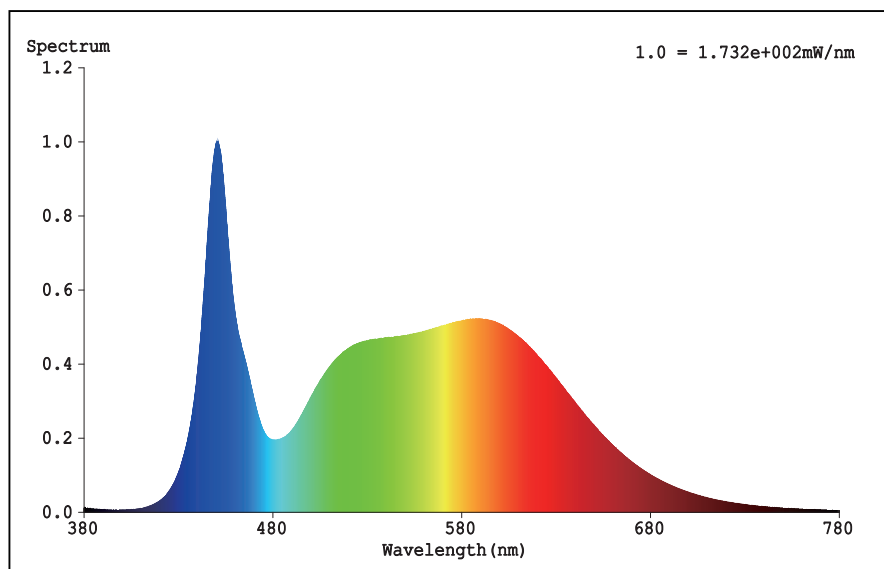

Chromaticity CIE1931 Diagram

SPECIFICATIONS

Input Voltage	120~277Vac
Frequency	50/60Hz
Wattage	20W/30W/40W
Input Current (Max)	0.4A
Output Current	1.05A
Power Factor	> 0.9
Lumens	2800-4000-5000Lm
Wattage Equivalency	90W
Color Temperature	4000K/5000K/6500K
CRI	> 80
Beam Angle	120°

Efficiency(LM/W)	125Lm/W
Power Type	Hardwired
Operating Temperature	-4°F~104°F
Moisture Rating	Damp Rated
Dimmable	0-10V Dimming
Material Housing	SPCC+PS Lens
Flick	< 30%
Starting time	< 1S
Lifetime	50,000 Hours
Warranty	5-Year