

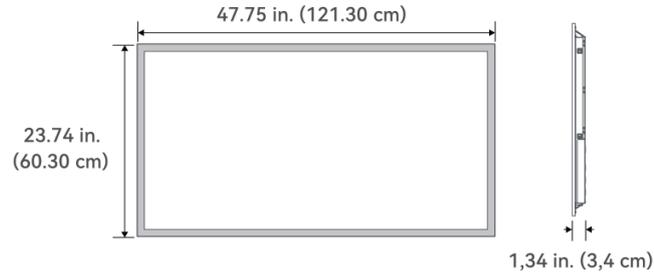


2X4 LED FLAT PANEL WITH SELECTABLE 3CCT

Back-lit emitting, Ultra slim design, light weight
Meet DLC 5.1 standard and premium version
5CCT and 5 wattages (30/40/50/60/72W) selectable
0-10V Dimming (10~100% Dimming range),
Easy and Safe Installation
Suitable for damp location
50000 Hours Lifespan

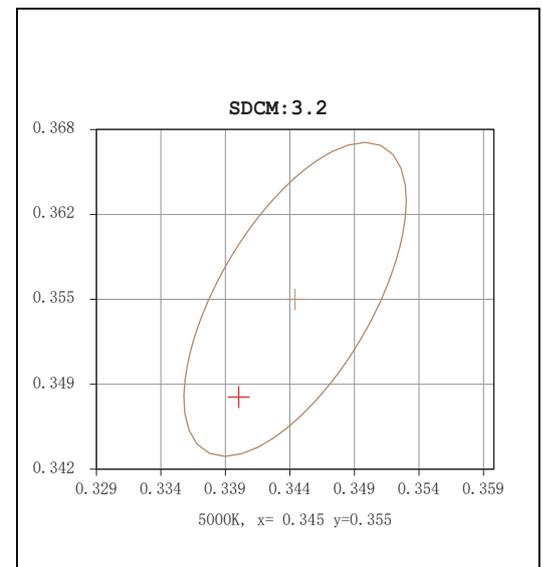

LIGHT DISTRIBUTION ANGLE

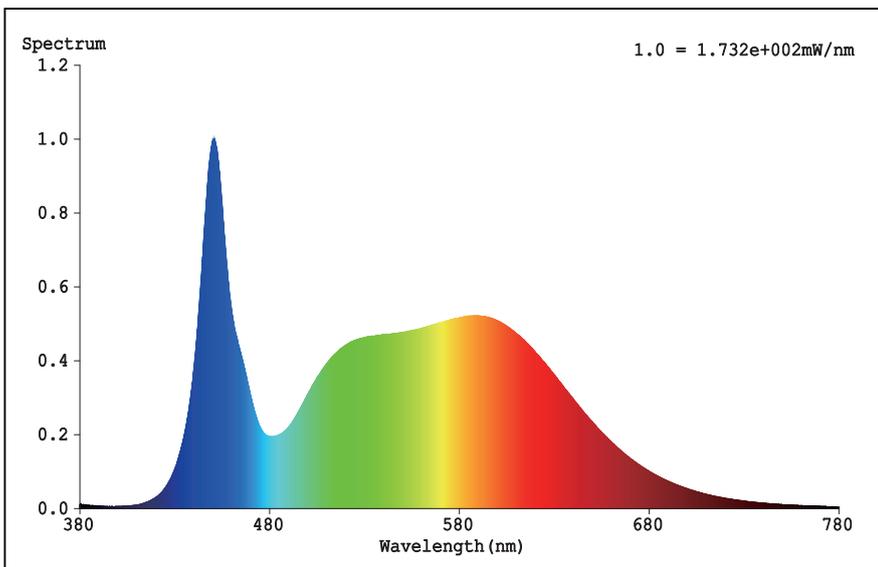

Chromaticity CIE1931 Diagram

SPECIFICATIONS

Input Voltage	120~277Vac
Frequency	50/60Hz
Wattage	30W/40W/50W/60W/72W
Input Current (Max)	0.65A
Output Current	1.35A
Power Factor	> 0.9
Lumens	4250-5400-6250-7500-9000Lm
Wattage Equivalency	150W
Color Temperature	3500K/4000K/5000K/6000K/6500K
CRI	> 80
Beam Angle	120°

Efficiency(LM/W)	125Lm/W
Power Type	Hardwired
Operating Temperature	-4°F~104°F
Moisture Rating	Damp Rated
Dimmable	0-10V Dimming
Material Housing	SPCC+PS Lens
Flick	< 10%
Starting time	< 1S
Lifetime	50,000 Hours
Warranty	5-Year