



5 IN 1 Slim Panel LED Recessed Downlight

Top Rated 6 Inch 5CCT Slim LED Downlight with Junction Box.

5 color temperature selectable, no need to worry about what color temperature to buy. Ultra-thin canless downlights only require as small as 6 inches ceiling spaces, fitting various ceilings, and joists. 1050LM consumes 12 Watts equivalent to 110W halogen lamp, saving you up to 90% in energy costs. 5-Year Warranty! We will be 100% responsible for our products!



LIGHT DISTRIBUTION ANGLE

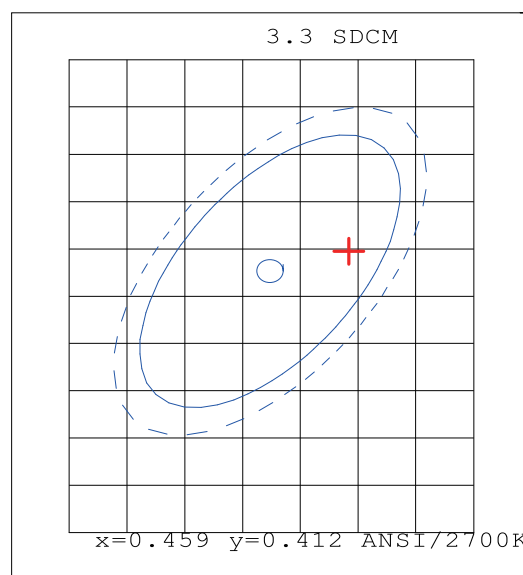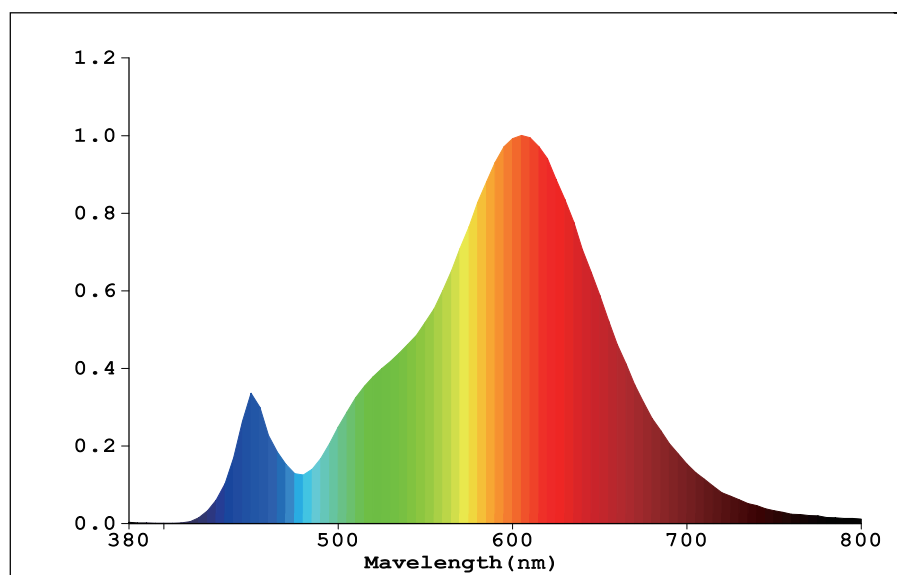

Chromaticity CIE1931 Diagram

SPECIFICATIONS

Input Voltage	120V
Max output Voltage	36V
Wattage	12W
Input Current	0.111A
Max output Current	274mA
Power Factor	> 0.9
Lumens	1050LM
Equivalency	110W
Color Temperature	2700K/3000K/3500K/4000K/5000K
CRI	80+
Beam Angle	120°
Dimmable	Yes

Efficiency(LM/W)	87Lm/W
Frequency	60Hz
Operating Temperature	-4°F-104°F
Suitable for Damp Locations Ingress	Yes
IC Rated	Yes
Housing	AL
Wiring	Copper
Average Life (Hours)	50000hours
Warranty	5-Years
Switching Time	> 30000