



WALL OUTLET


■ User Manual

GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders Or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(888) 676-1042 Monday - Friday from 9:00AM - 5:00PM (PT)

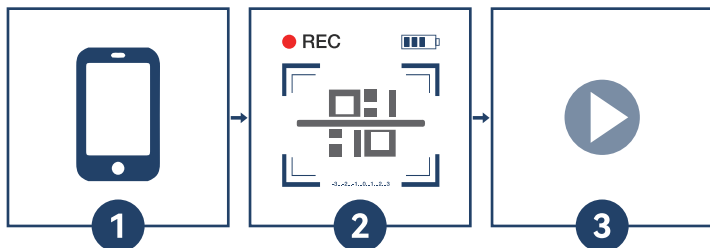

Need a Video Instruction Guide?
Please scan the QR code.

If the QR code is invalid, please contact us for the video.

SAFETY INFORMATION

TO INSTALL:

WARNING: TO BE INSTALLED AND/OR USED IN ACCORDANCE WITH APPROPRIATE ELECTRICAL CODES AND REGULATIONS.

WARNING: IF YOU ARE NOT SURE ABOUT ANY PART OF THESE INSTRUCTIONS, CONSULT AN ELECTRICIAN.

CAUTION: To clean use a damp cloth with mild soap. DO NOT use disinfecting products, including foggers, sprays or other types of atomized cleaning agents.

FOR SEPARATE FEED CONVERSION ONLY: Our outlet is provided with a break-off fin located between the two brass terminal screws. If you want to have the top outlet and the bottom outlet controlled by two different hot wires (two circuits), remove the break-off fin before wiring. With needlenose pliers, bend fin back and forth until it breaks off.

DECORATOR RECEPTACLE WALL OUTLET

1. **WARNING: TO AVOID FIRE, SHOCK, OR DEATH; TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!**

2. Remove insulation per strip gage on device [about 1/2" (1.3 cm)].

3. Connect wires per **WIRING DIAGRAM** as follows:

To Side Wire: Loop wires clockwise 3/4 turn around terminal screws. **BLACK** (hot) wire to **BRASS** screw, **WHITE** (neutral) wire to **SILVER** screw, **GREEN** or **BARE** (ground) wire to **GREEN** screw. Tighten screws over wire loops to 14-18 in lbs. Terminal screws accept up to #12 AWG copper or copper clad wire.


To Quickwire™: Insert straight #14 AWG solid copper wires into round Quickwire™ holes. Quickwire™ terminals accept #14 AWG solid copper wires **ONLY!** For circuits with #12 AWG solid copper or #14-#12 AWG copper clad wires, use terminal screws instead. If the receptacle must be replaced or rewired after Quickwiring, gently press the tip of a small screwdriver in the release slot and back the wire out gradually .

4. Mount device using long mounting screws. Attach wallplate (not included).


5. Restore power at circuit breaker or fuse. Installation is complete.

DECORATOR RECEPTACLE WALL OUTLET

(The following wiring applies to 15Amp and 20Amp outlets)

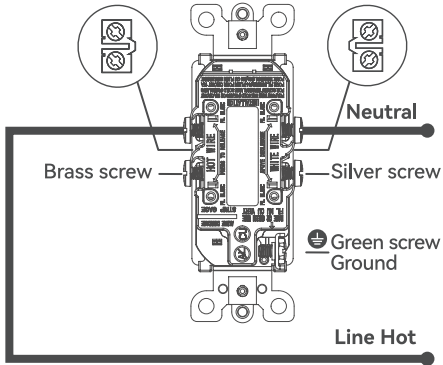

Common feed (Fins intact)

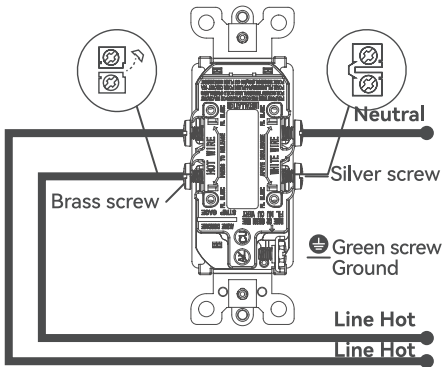

Separate feed (Remove HOT fin only)

01 30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders. Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02 3-Year Warranty


We guarantee your product is free from defects in product material and workmanship for three (3) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.

03 Quick Response within 12 Hours


If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently.

The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.

- ① Log into your Amazon.com account, click **"Returns&Orders"** on the top-right corner.

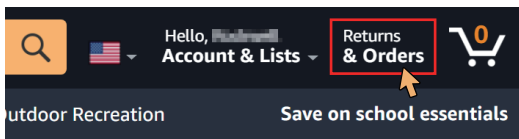


- ② Find your order in the list and click **"View order details"**.

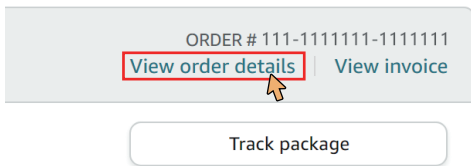


- ③ Click the **"Store Name"** following the Sold by, below the product title.

Delivered yesterday



Sold by: [Store Name]
 Serial Numbers:
 AZ: [Serial Numbers]
 Return eligible through Sep 8, 2021
 \$49.99

- ④ Click the yellow button "Ask a question", on the top-right corner, to contact the seller.

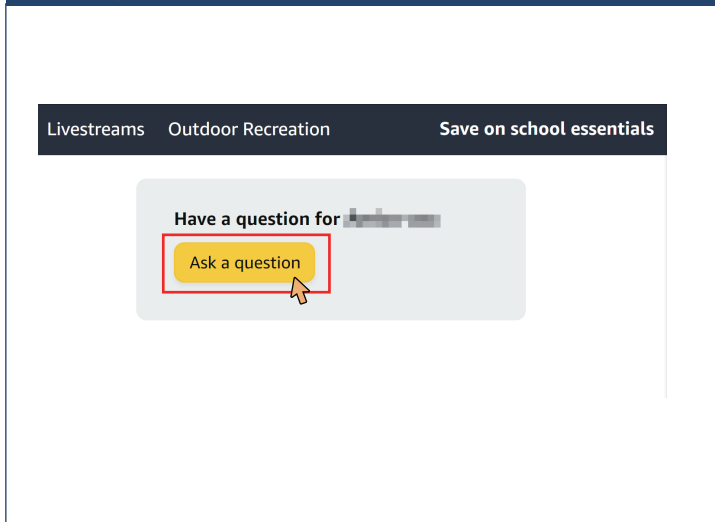

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

Call us:

+1(888) 676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

Contact via Email: support@amicolight.com



GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders.

Or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(888) 676-1042

Monday - Friday from 9:00AM - 5:00PM (PT)

MADE IN CHINA